

ACHTUNG / ATTENTION




bitte den Mindestabstand zwischen Reifen bei vollem Federweg beachten!
Mind the minimum distance between tyre at full spring travel!



EN. X-BLADE

Toolfree mounting with quick-release power strap system. 2-joint angle adjustment for perfect alignment.



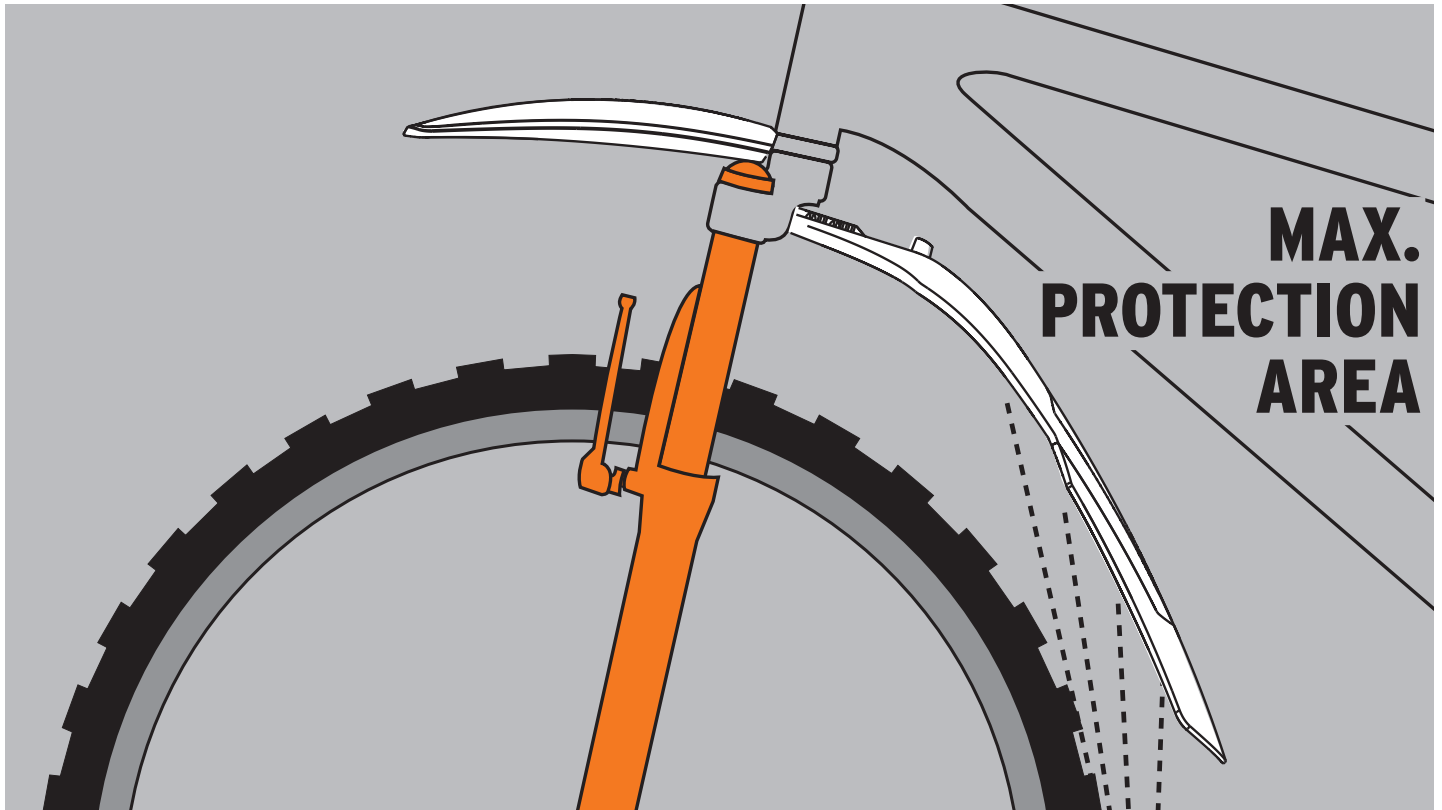

LIEFERUMFANG · SUPPLIED WITH:

- Konus · cone diameter 1 → 15 - 19 mm
- Konus · cone diameter 2 → 19 - 23 mm
- Konus · cone diameter 3 → 23 - 27 mm
- Konus · cone diameter 4 → 27 - 31 mm
- Konus · cone diameter 5 → 31 - 35 mm

ACHTUNG / ATTENTION



bitte den Mindestabstand zwischen Reifen und Gabelbrücke bei vollem Federweg beachten!

Mind the minimum distance between tyre and fork crown at full spring travel!

EN. SHOCKBLADE

Dirtboard for front suspension assembly. Snap-on fastening, quick, easy assembly. Supplied with mounting kit. Compatible with most suspension forks. High spray protection.