


CHANGE LOCK COMBINATION

LOCKCAGE default combination number is 0-0-0. Before attempting to change the combination, make sure the lock's dial is set to 0-0-0.

- 1 Press the cable end pin into the **LOCKCAGE** until a «Click» is felt.




- 2 Change the dial to the desired combination number.




- 3 Pull back the tip back to its original position until a «Click» is felt.



- 4 Lock the **LOCKCAGE** and desired accessories to the bike by pushing in the tip of the cable to the lock shack.




- 4 Change the dial to a random number to secure the **RIDEAIR™**.




USE LOCKCAGE

- 1 Turn the dial until the set combination number is shown (Default combination number is »0-0-0«).




- 2 Press the cable's release button continuously and pull the cable from its tip.

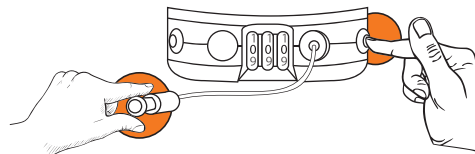


Pulling the cable without pressing the release button may damage the cable coating!

RELEASE THE LOCK


- 1 Turn the dial until the set combination number is shown (Default combination is »0-0-0«).



- 2 Press the tip release button to release the cable from the shack.



- 3 Press the cable release button continuously to retract the cable back to its original place.



It is recommended to hold the cable while retracting it for a safer use.

EN. LOCKCAGE

Bottle cage with cable lock.